

karloskar
powergen

OPTIPRIME



BETTER POWER
FOR A

limitless

T O M O R R O W

CPCB IV+ COMPLIANT

117 • 400 • 500 • 640 • 1000 • 1500 • 2020kVA



BETTER POWER
FOR A

limitless

T O M O R R O W

A RICH HERITAGE OF OVER A CENTURY OF ENGINEERING EXCELLENCE.

Kirloskar powering generating sets prioritize user experience, delivering exceptional features and benefits. Streamlined installation and enhanced dependability to expedited service, reduced maintenance costs, and optimized performance.


Kirloskar Powergen sets itself apart with groundbreaking engineering that establishes new industry benchmarks.



limitless POTENTIAL, SUSTAINABLE PRACTICES

Our state-of-the-art manufacturing facility embodies our commitment to sustainable practices. We partner with nature to power the facility itself, transforming waste into valuable resources. This focus on sustainability inspires both our workforce and surrounding communities. It's here, where cutting-edge technology meets exceptional skills, that we engineer solutions to empower limitless possibilities.

Discover our Plant with a
QR Code Scan.



OPTIPRIME

117 • 400 • 500 • 640 • 1000 • 1500 • 2020 kVA



— THE VERSATILE INFRASTRUCTURE POWER SOLUTION —



Infrastructure



Industry



IT Sector



Hospitality



Healthcare



Real Estate



Government



Logistics

Optiprime Genset Technical Specifications

ENGINE MODEL		4R810ETA 4G1	6K1080ETA 4G2	6SL90ETA 4G2	6SL90ETA 4G3	DV8 ETA 4G3	DV12 ETA 4G2	DV16 ETA G3
Rated output (Prime continuous ratings as per ISO 8528-1)	kW	54.4 x 2	183.8 x 2	228 x 2	279.5 x 2	447 x 2	662 x 2	889 x 2
	HP	74 x 2	250 x 2	310 x 2	380 x 2	608 x 2	900.6 x 2	1210 x 2
Number of Cylinders	No.	4 x 2	6 x 2	6 x 2	6 x 2	8 x 2	12 x 2	16 x 2
Cubic Capacity ²	Ltrs.	3.24 x 2	6.48 x 2	8.86 x 2	8.86 x 2	15.92 x 2	23.88 x 2	31.84 x 2
Lube Oil Change Period	Hrs.	500	500	500	500	500	500	500
Lube Oil Sump Capacity	Ltrs.	10 x 2	25 x 2	27 x 2	27 x 2	40 x 2	73 x 2	130 x 2
Coolant Capacity	Ltrs.	12.70 x 2	28.9 x 2	36.4 x 2	36.4 x 2	63.2 x 2	173.9 x 2	180 x 2
AdBlue / DEF Capacity	Ltrs.	NA	45 x 2	45 x 2	45 x 2	45 x 4	45 x 4	-
Block Loading Capacity	%	60	50	55	50	55	53	55

[illegible]


SYNCHRONIZATION PANEL

	OPTIPRIME 117 CPCB IV+ 58.5 x 2 kVA	OPTIPRIME 400 CPCB IV+ 200 x 2 kVA	OPTIPRIME 500 CPCB IV+ 250 x 2 kVA	OPTIPRIME 640 CPCB IV+ 320 x 2 kVA	OPTIPRIME 1000 CPCB IV+ 500 x 2 kVA	OPTIPRIME 1500 CPCB IV+ 750 x 2 kVA	OPTIPRIME 2020 CPCB IV+ 1010 x 2 kVA Containerized
Incoming Breaker	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Outgoing Breaker	Not Available	Not Available	Not Available	Not Available	Not Available	Not Available	Optional
Synchronization Controller**	KG1500	KG1500	KG1500	KG1500	KG1500	KG1500	KG1500

^ Tolerances Apply
With 0.845 Specific Gravity of diesel (5% Tolerance)
\$ These weight are for handling & transportation only, ±5% tolerance apply
* Efficiency of Alternator as per standards IEC 60034-1

** For operation of outgoing breaker higher version of Synchronization controller is required
For Site Conditions other than standard operating conditions consult Kirloskar Oil Engines Ltd.
For Site specific layout consult Kirloskar Oil Engines Ltd to ammend the Genset alignment/configuration

MULTI GENSETS OPERATIONS
DIGITALIZATION: KIRLOSKAR KG1500 CONTROLLER

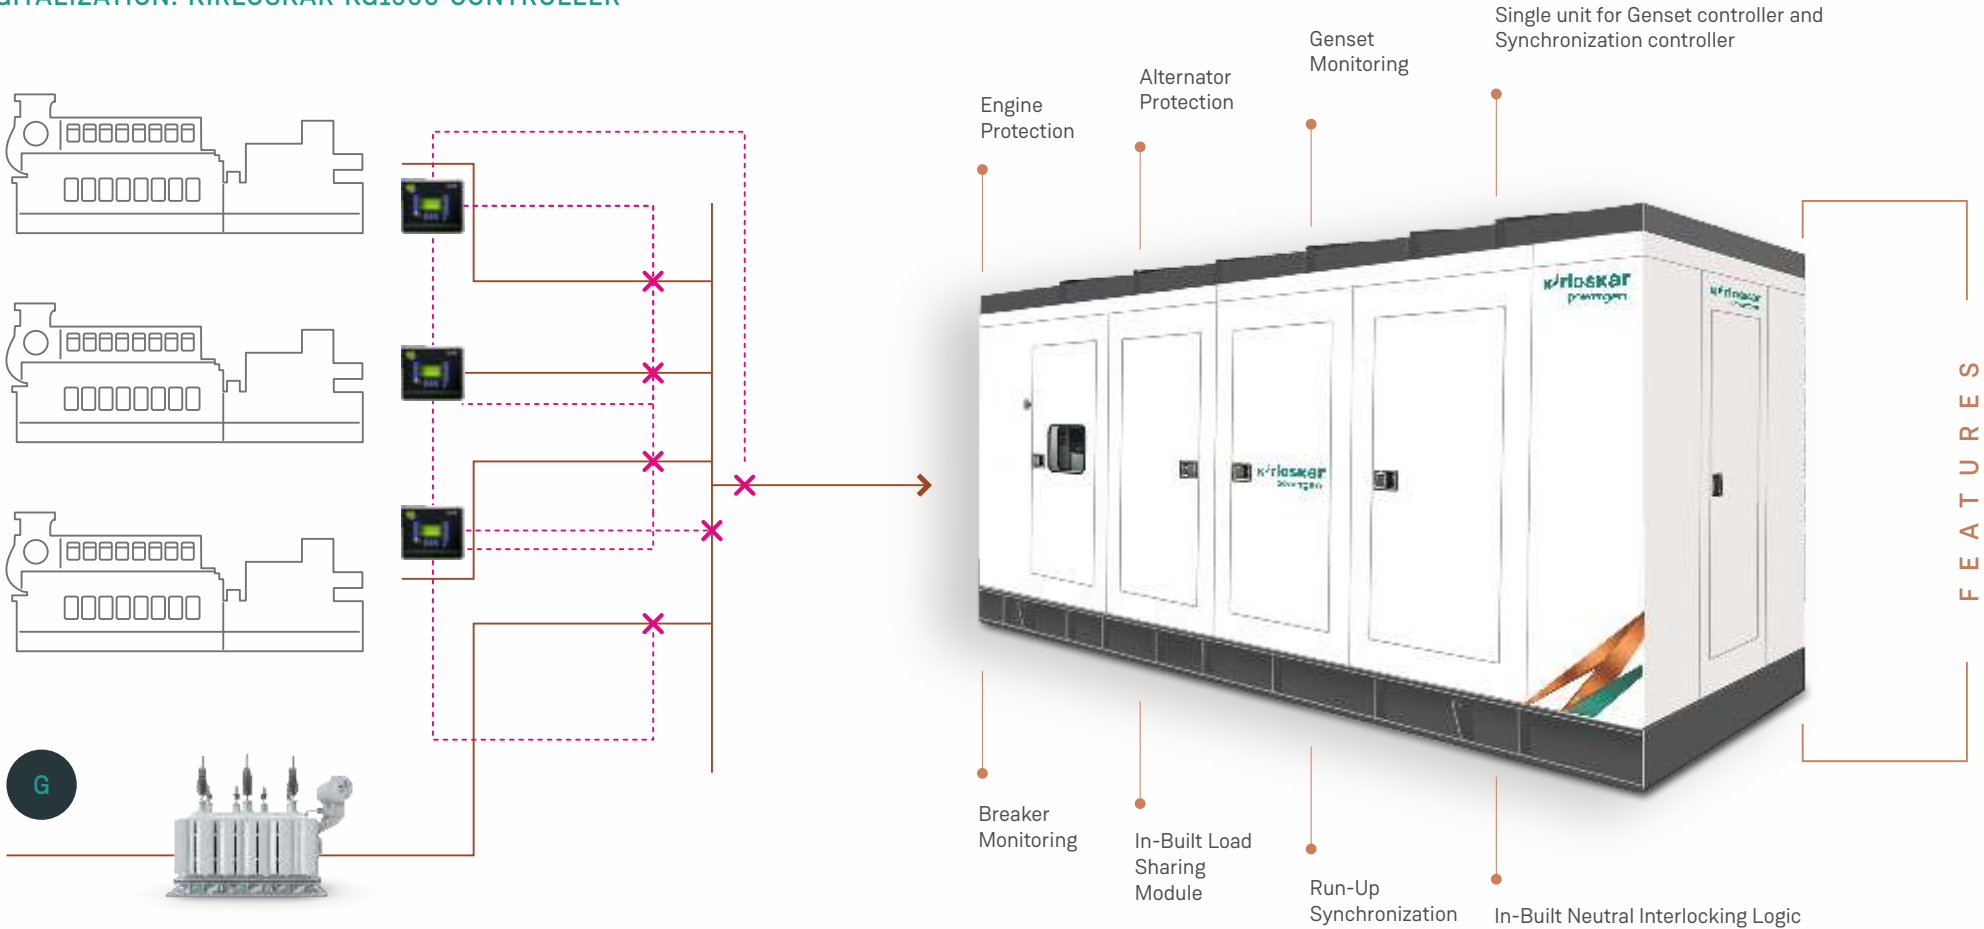

CUSTOMISED POWER SOLUTIONS FOR DYNAMIC NEEDS

Businesses worldwide face fluctuating power demands. Whether due to daily variations or specific usage patterns, a flexible power solution is essential.

Kirloskar offers the Optiprime, a customized solution ideal for applications with variable power needs. This innovative system tackles fluctuating loads, reducing fuel consumption and CO2 emissions by up to 40%.

The Optiprime's centralized control panel with an integrated Power Management System ensures optimal performance. This intelligent system seamlessly switches on or off the two power packs based on real-time load requirements.

The Optiprime's versatility extends to its configuration options. It can be deployed as a single unit, or two separate units can be combined, with prime and standby power functionalities housed within a single enclosure.

OPTIPRIME

FEATURES



Patented Hybrid Technology



Optimum Power



Optimal Efficiency



Optimised Fuel Consumption



Reduced Ownership Cost



Twin-Hybrid Power Packs and
In-built Synchronisation



Reduced Carbon Dioxide
Emissions by 40%



Reduced Nitrous Oxide
Emissions by 50%



Better Flexibility



Lower Product Footprint -
20% Reduction in Space

OPTIPRIME

FEATURES

Prime Rating:

Unlimited hours, 10% temporary overload possible.

O2E Series

Optimal Operating Efficiency even at partial loads, further reducing costs.



Bigger Engine (cc):

Better genset performance and faster load handling

Common Rail Direct Injection (CRDi):

Advanced fuel injection for better performance, lower emissions, and smoother operation.

CPCB IV+ Compliant:

Performance, clean power and reduced costs

Control Your Power, Anytime, Anywhere:

Monitor your Kirloskar genset remotely, receive alerts, and access service with a tap with our Remote Monitoring System


Beyond Efficiency.

A Closer Look at Cutting-Edge Technology

O2E Series: Low Emission

High Efficiency

Efficient CRDi System

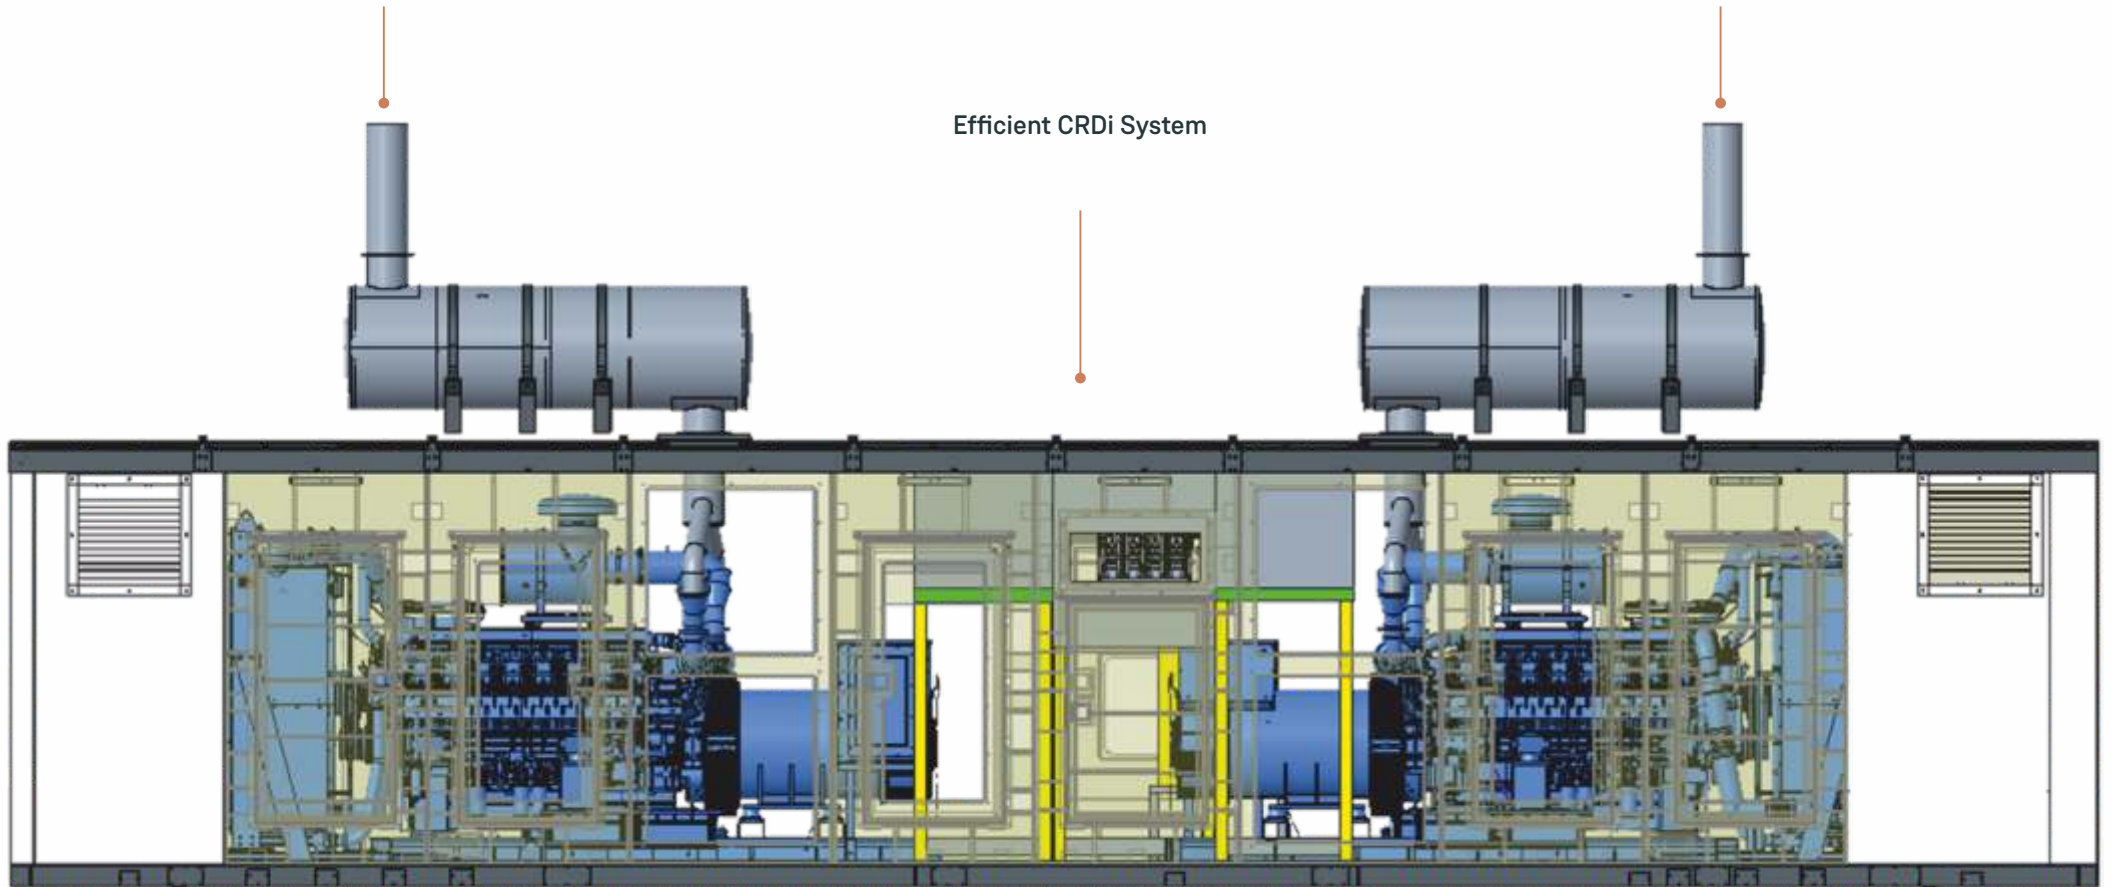

500 Hours Lube Oil Change Period

Compact, Robust and Efficient.

Base Mounted Radiator System



Microprocessor Based Controller




Graphical LCD Display



Advanced Monitoring and Diagnostics

2 X POWER: INNOVATION COMBINED WITH OPTIMAL EFFICIENCY

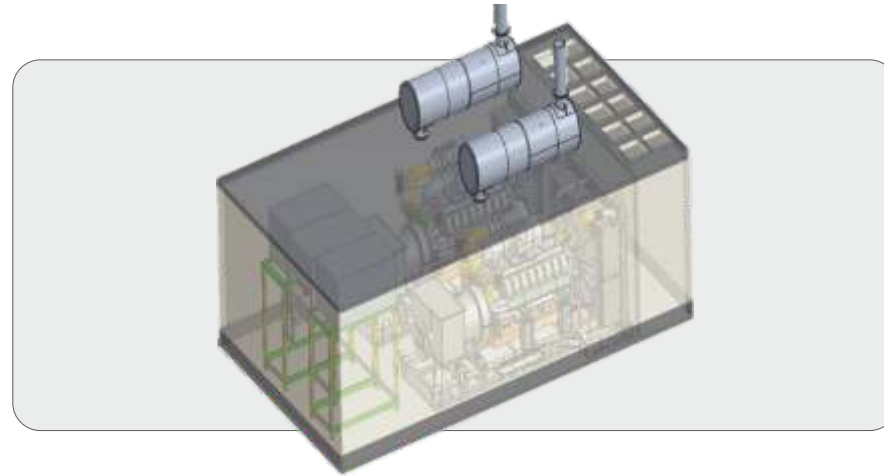

- Optimum Power :
- Allows 25% to 100% loading
- Auto load monitoring and sharing
- Optimum Footprint :
- Reduction in footprint
- Optimum Saving :
- Best in class fuel consumption
- Optimized fuel Consumption at varied load

- Multiple configuration options available based on customer and site requirements
- Common Power output to load
- Single package solution
- Power redundancy
- Enhance Reliability
- Ease of handling and transportation

COMBINING INNOVATION WITH EFFICIENCY



Operation

- One Master One Slave
- Logic / power sharing with equal rating of kVA & frequency
- Inbuilt AMF Capable Controllers
- DG sets can be operated in two modes: Auto mode & Manual mode



Auto Mode

- Both DG to start in Synch within 30 sec.
- Load monitoring for 180 sec
- Continuous load monitoring
- Load transfer when load goes down below 70%
- Fully programmable



Manual Mode

- Manual Operation possibility in case of urgency
- During service schedule

Output



EFFICIENCY. INTEGRATED

A KIRLOSKAR PROMISE

Efficient Products

- India's first IoT enabled digital genset
- Designed for convenient user experience
- Best-in-class fuel efficiency delivered
- Compact design & long life product
- Optimized consumption of lubricant oil
- Optimized total cost of ownership (TCO)
- All products tested before delivery



Efficient Solutions

- Load sizing for every single genset order
- One stop power back-up solutions
- Serves complete application gamut
- Highly trained & experienced team
- Non-conventional solutions (bio-diesel)
- Specific solution for harsh environments
- Exhaust mgmt., foundation, cabling etc.

Efficient Service

- India's widest service dealer network
- Kirloskar connect-self-service application
- FSR-Electronic field service report
- Over 6000 trained service engineers
- Over 600,000 machines under care
- 98%+ parts available at each outlet
- Flexible & economical AMC-Bandhan



Efficient Network

- Consistent, reliable & long-established
- 250+ expert touch points across India
- 500+ solution oriented professionals
- Uniform customer experience across
- Central system for enquiry to PRF
- Fair trade practices & Price transparency

Efficient Deliveries

- Cost-effective deliveries guaranteed
- Assured 7-day delivery of gensets
- Supports project management system
- Reduced working capital for customer
- Award-winning replenishment model
- Assurance of FRESH products always



Efficient 24x7 Care

- 24x7 operational customer care centre
- Team of over 70 trained & focused exec.
- Tracking every service request till closure
- Centrally maintained CRM for all requests
- Satisfaction call after every SR closure
- Central sales lead tracking system
- Continuous NPS and CDI measurement

We offer products for every segment & take part in the India's growth story.



Infrastructure



Industry



IT/ITES



Hospitality



Health



Realty



Government



Logistics



SHAPING THE FUTURE.
DELIVERING POWER GLOBALLY.

INGENIOUS DESIGN.
UNMATCHED PERFORMANCE.

KIRLOSKAR OIL ENGINES LIMITED
A Kirloskar Group Company

Regd. Office: 13, Laxmanrao Kirloskar Road,
Khadki, Pune, Maharashtra 411 003
INDIA



Tel: +91 (20) 2581 0341
Fax: +91 (20) 2581 3208, 2581 0209
Helpline: +91 8806 33 44 33
koel.helpdesk@kirloskar.com



BETTER POWER
FOR A

limitless
TOMORROW

Authorised GOEM



KALA Genset Pvt. Ltd.
A-37, H Block, MIDC, Pimpri,
Pune - 411 018, Maharashtra, India.
Email: info@kalabiz.com
Toll Free # 1800 123 0018
Website - www.kalagenset.com

Marks 'Kirloskar' along with the suffix, or prefix, 'I' as shown and copyright 'limitless' are owned Kirloskar Proprietary Limited, and Kirloskar Oil Engines L. td. is the Permitted User.
This Catalog is copyrighted and may not be reproduced in any form not even parts of it, without previous written permission by copyright owners, Kirloskar Oil Engines L. td.
Product improvement is a continuous process. Kindly contact Kirloskar Oil Engines Ltd. for latest information.
Images are for illustration purposes only.